

# VIBROVAGLI PER BARBOTTINE

## SLM 900-1200 1-2/X



### CARATTERISTICHE COSTRUTTIVE:

Parti a contatto in acciaio Inox Aisi304  
 Basamento fisso circolare  
 Coperchio opzionale con bocca di carico  
 Motovibratore con protezione IP65

### CARATTERISTICHE TECNICHE:

#### Potenza elettrica:

SLM 900 1Kw 1500' ; SLM 1200 1,2Kw 1500'

#### Numero di reti: 1 o 2

#### Superficie vagliante:

SLM 900 1/x 0,6 mq ; SLM 1200 1/x 1,1 mq

SLM 900 2/x 1,2 mq ; SLM 1200 2/x 2,2 mq

#### Peso:

SLM 1/x 900 185 Kg ; SLM 1/x 1200 220 Kg

SLM 2/x 900 210 Kg ; SLM 2/x 1200 250 Kg

### UTILIZZO:

Per la selezione di barbotine ceramiche ad alta densità.

### VANTAGGI:


Ottime portate

Ingombri minimizzati

Silenziosità

### DIMENSIONI

MODEL (MM.) DIMENSIONS	SLM 900 1/X	SLM 1200 1/X	SLM 900 2/X	SLM 1200 2/X
	A	460	460	460
B	-	-	650	700
C	650	700	570	830
D	920	1030	1050	1160
E	620	720	620	720
F	50 X (140)	50 X (140)	50 X (140)	50 X (140)
G	950	1165	950	1165
H	990	1205	990	1205
I	600	700	600	700
WEIGHT (KG.)	185	220	210	250
POWER (KW.)	1	1,2	1	1,2

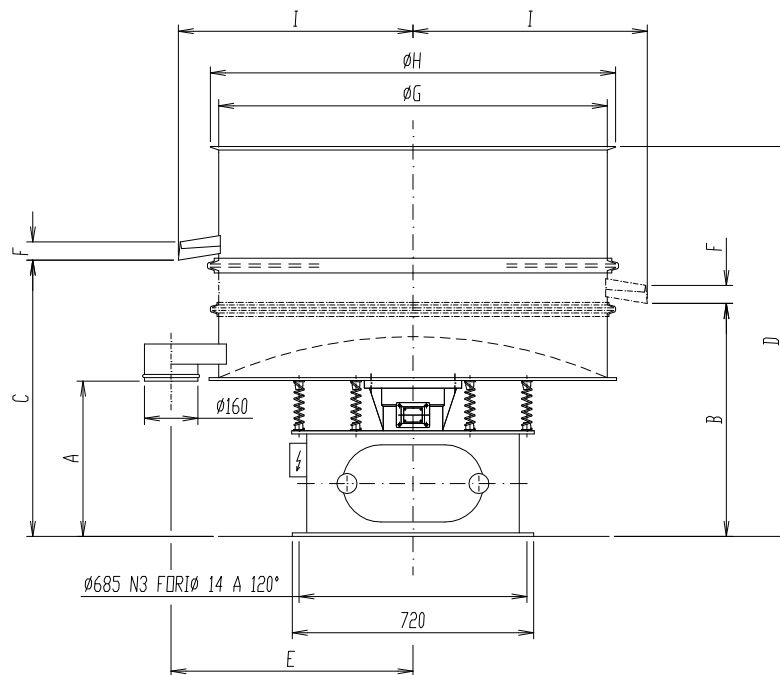

**C.I.S. s.r.l. v. Felice Casorati n.16**  
**Z. Ind.le Mancasale, 42124 Reggio Emilia**  
**Tel. +39 0522 517286 Fax. +39 0522 513696**  
**Web site: [www.cis-web.it](http://www.cis-web.it) E-mail: [info@cis-web.it](mailto:info@cis-web.it)**  
**C.F. e P.IVA 01687420354**

# VIBRATING SIEVE FOR SLIP SCREENING

## SLM 900-1200 1-2/X



### CONSTRUCTION FEATURES:

Fixed base  
High splash-free ring plate  
Motovibrator with cast iron casing, protection IP65

### TECHNICAL FEATURES :

#### Electric Power:

SLM 900 1Kw 1500' ; SLM 1200 1,2Kw 1500'

#### Number of decks: 1 or 2

#### Screening surface:

SLM 900 1/x 0,6 mq ; SLM 1200 1/x 1,1 mq

SLM 900 2/x 1,2 mq ; SLM 1200 2/x 2,2 mq

#### Weight:

SLM 1/x 900 185 Kg ; SLM 1/x 1200 220 Kg

SLM 2/x 900 210 Kg ; SLM 2/x 1200 250 Kg

### APPLICATIONS :


Slip screening after grinding.

### ADVANTAGES:

High efficiency due to the high frequency vibrations and the special waste discharge.  
High output performances thanks to the large screening surface.

### DIMENSIONS

MODEL (MM.) DIMENSIONS	MODEL			
	SLM 900 1/X	SLM 1200 1/X	SLM 900 2/X	SLM 1200 2/X
A	460	460	460	460
B	-	-	650	700
C	650	700	570	830
D	920	1030	1050	1160
E	620	720	620	720
F	50 X (140)	50 X (140)	50 X (140)	50 X (140)
G	950	1165	950	1165
H	990	1205	990	1205
I	600	700	600	700
WEIGHT (KG.)	185	220	210	250
POWER (KW.)	1	1,2	1	1,2

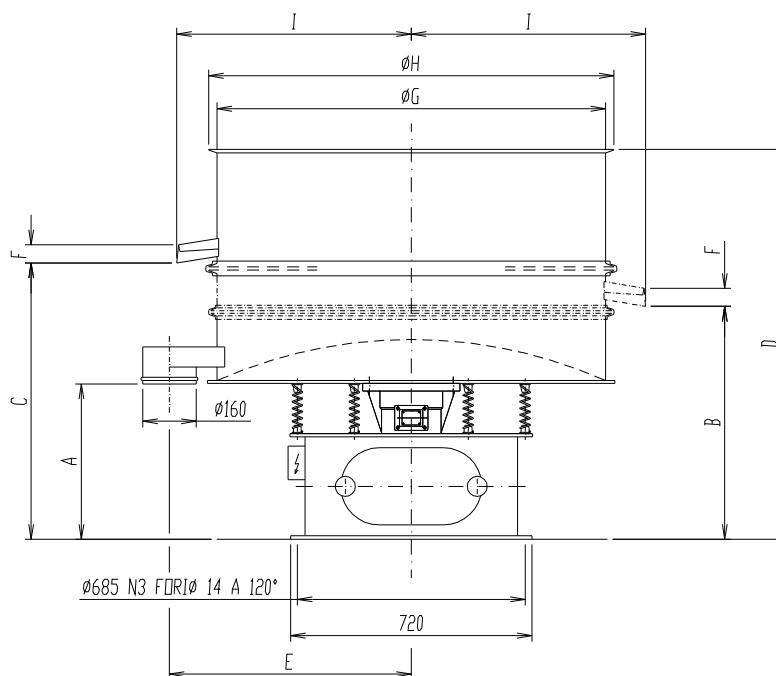

**C.I.S. s.r.l. v. Felice Casorati n.16**  
**Z. Ind.le Mancasale, 42124 Reggio Emilia**  
**Tel. +39 0522 517286 Fax. +39 0522 513696**  
**Web site: [www.cis-web.it](http://www.cis-web.it) E-mail: [info@cis-web.it](mailto:info@cis-web.it)**  
**C.F. e P.IVA 01687420354**